

SWEP AB35T – AHRI Certified®

SWEP A is our AHRI Certified® range of Brazed Plate Heat Exchangers. If you are looking for the additional security of third-party verified performance for your HVAC systems, this is the choice.

The AB35T is ideal for many applications in district heating, heat recovery for industry, HVAC, combined heat & power and engine oil cooling. It is the perfect choice for efficient heat transfer with a low pressure drop in systems with up to 2½" piping and 58 m³/h (255 gpm) water flow.

Connections*



*For specific dimensions, or information about other types of connections, please contact your SWEP sales representative.



Pressure classes

S Standard, evaluated per EN 13345.

M Medium, evaluated per EN 13345.

H0/M0 Plates

Port size F1/P1	42 mm (1.654 in)
Port size F2/P2	42 mm (1.654 in)
Port size F3/P3	42 mm (1.654 in)
Port size F4/P4	42 mm (1.654 in)
Max volume flow	27 m³/h (118.8 gpm)

H4/M4 Plates

Port size F1/P1	61 mm (2.402 in)
Port size F2/P2	61 mm (2.402 in)
Port size F3/P3	61 mm (2.402 in)
Port size F4/P4	61 mm (2.402 in)
Max volume flow	58 m³/h (255.2 gpm)


Max number of plates (NoP)	260
Channel volume (SI)	0,18 dm³
Channel volume (US)	0.00636 ft³

H2/M2 Plates

Port size F1/P1	42 mm (1.654 in)
Port size F2/P2	61 mm (2.402 in)
Port size F3/P3	42 mm (1.654 in)
Port size F4/P4	61 mm (2.402 in)
Max volume flow	58 m³/h (255.2 gpm)

Materials

	Channel plate	Brazing
SC	Stainless steel	Copper

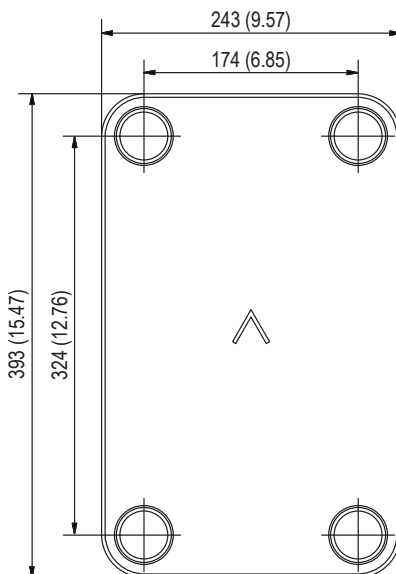

Size

	Height of plate pack	Total weight
SC S H0/M0	10+(2,26×NoP) mm	7,27+(0,256×NoP) kg
	0.394+(0.089×NoP) in	16.04+(0.564×NoP) lb
SC M H0/M0	22+(2,26×NoP) mm	15,8+(0,256×NoP) kg
	0.866+(0.089×NoP) in	34.7+(0.564×NoP) lb
SC S H2/M2	10+(2,26×NoP) mm	7,13+(0,252×NoP) kg
	0.394+(0.089×NoP) in	15.35+(0.554×NoP) lb
SC M H2/M2	22+(2,26×NoP) mm	15,4+(0,252×NoP) kg
	0.866+(0.089×NoP) in	34.0+(0.554×NoP) lb
SC S H4/M4	10+(2,26×NoP) mm	6,96+(0,247×NoP) kg
	0.394+(0.089×NoP) in	15.35+(0.545×NoP) lb
SC M H4/M4	22+(2,26×NoP) mm	15,0+(0,247×NoP) kg
	0.866+(0.089×NoP) in	33.2+(0.545×NoP) lb




CHALLENGE EFFICIENCY



www.swep.net



SWEP AB35T – AHRI Certified®

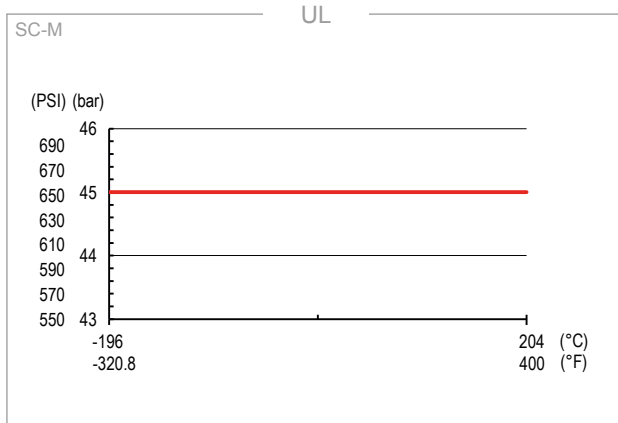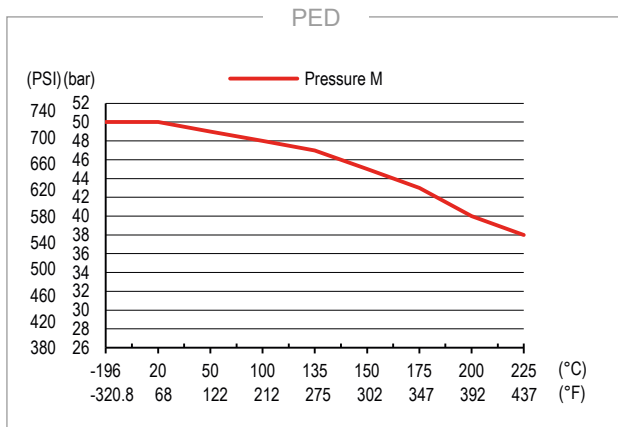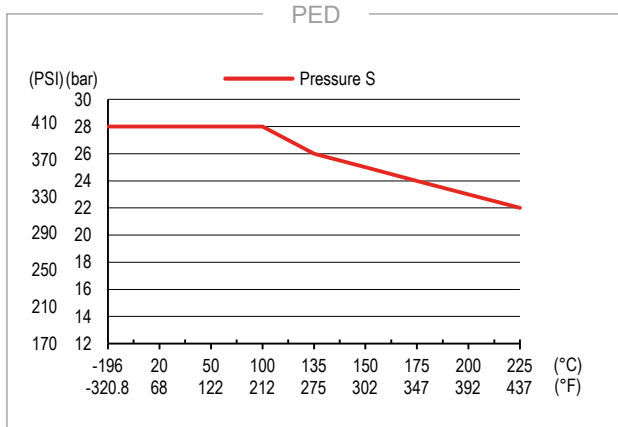

Third party approvals

SWEP BPHEs are generally approved by listed below certification organizations:

Europe, Pressure Equipment Directive (PED)


America, Underwriters Laboratories Inc (UL)

Japan, Kouatsu-Gas Hoan Kyoukai (KHK)

Additionally SWEP holds approvals from a vast variety of other certification organizations. For approval information regarding a specific product please contact your local SWEP representative. SWEP reserves the right to make changes without prior notice.

The BPHE concept

The Brazed Plate Heat Exchanger (BPHE) is constructed as a plate package of corrugated channel plates with a filler material between each plate. During the vacuum brazing process, the filler material forms a brazed joint at every contact point between the plates, creating complex channels. The BPHE allows media at different temperatures to come into close proximity, separated only by channel plates that enable heat from one media to be transferred to the other with very high efficiency. The concept is similar to other plate and frame technology, but without the gaskets and frame parts.

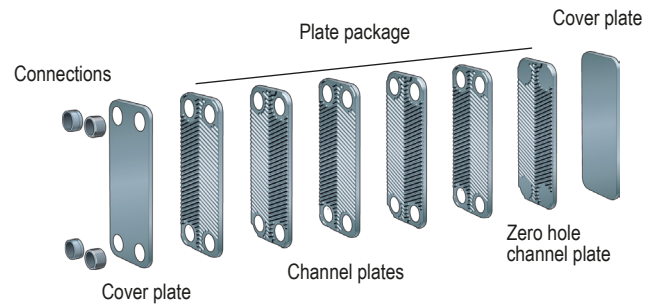

SSP calculation software

With SWEP's unique SSP, the SWEP Software Package, you can do advanced heat transfer calculations yourself, and choose the product solution that suits your application best. It's also easy to choose connections and generate drawings of the complete product. If you would like advice, or you would like to discuss different product solutions, SWEP offers all the service and support your need.

Material disclaimer

The information and recommendations in regards to the products are presented in good faith, however, SWEP makes no representations or warranties as to the completeness or accuracy of the information. Information is supplied upon the condition that the purchasers will make their own determination as to the products' suitability for their purposes prior to use. Purchasers should note that the properties of the products are both application and material selection dependent and that products containing stainless steel are still subject to corrosion if used in unsuitable environments.